



TIMES SQUARE




TIMES SQUARE


Times Square features a unique design in 10 contemporary colours. The range offers versatility and can be installed randomly to maximise creativity. Times Square is suitable for a wide range of environments including commercial, hospitality, retail, healthcare and education.

TIMES SQUARE


Colourways




Natural 06602
LRV 3.80




Yellow 06603
LRV 4.36




Lime 06606
LRV 4.98




Light Blue 06608
LRV 5.28




Lilac 06607
LRV 5.21




Dark Blue 06611
LRV 5.01




Orange 06604
LRV 4.56



Red 06605
LRV 4.51





Grey 06601
LRV 4.56



Light Grey 07700
LRV 7.67

Times Square features 6 unique designs in each colourway.




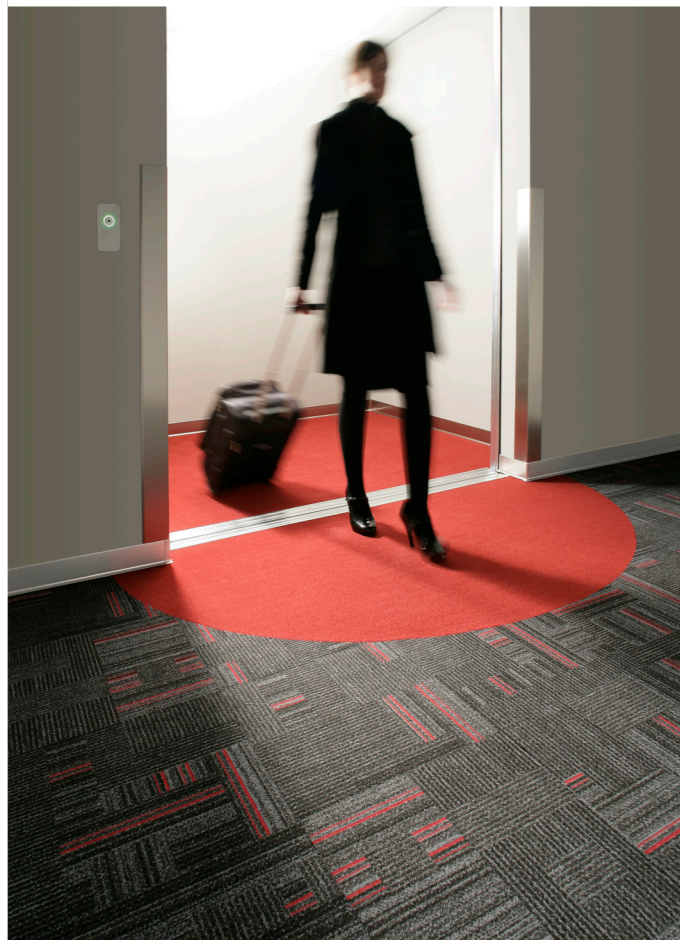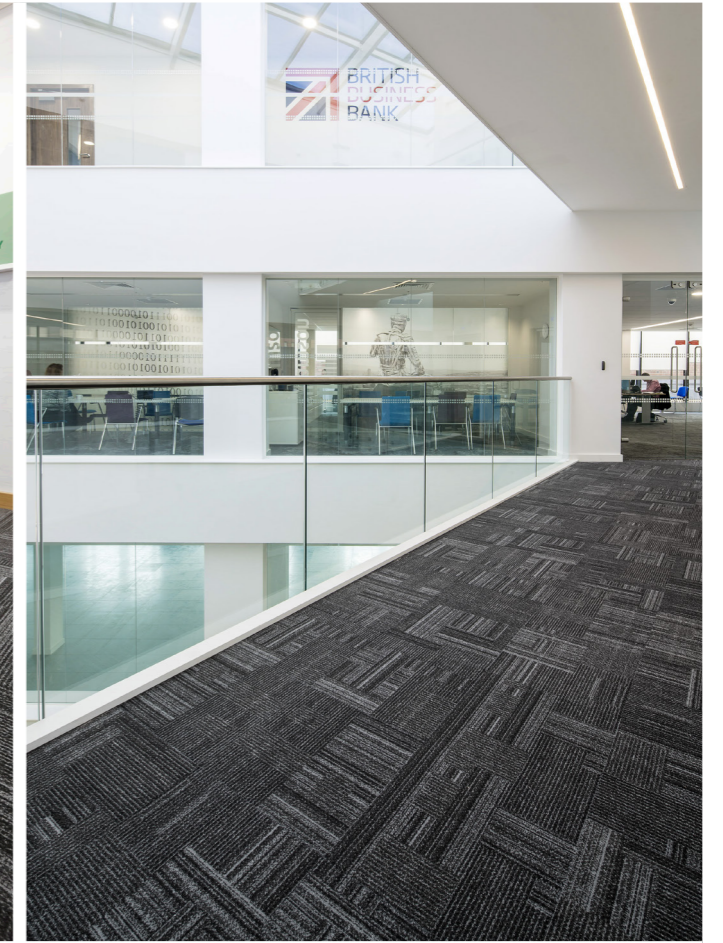





COMMERCIAL OFFICE FLOOR PLAN

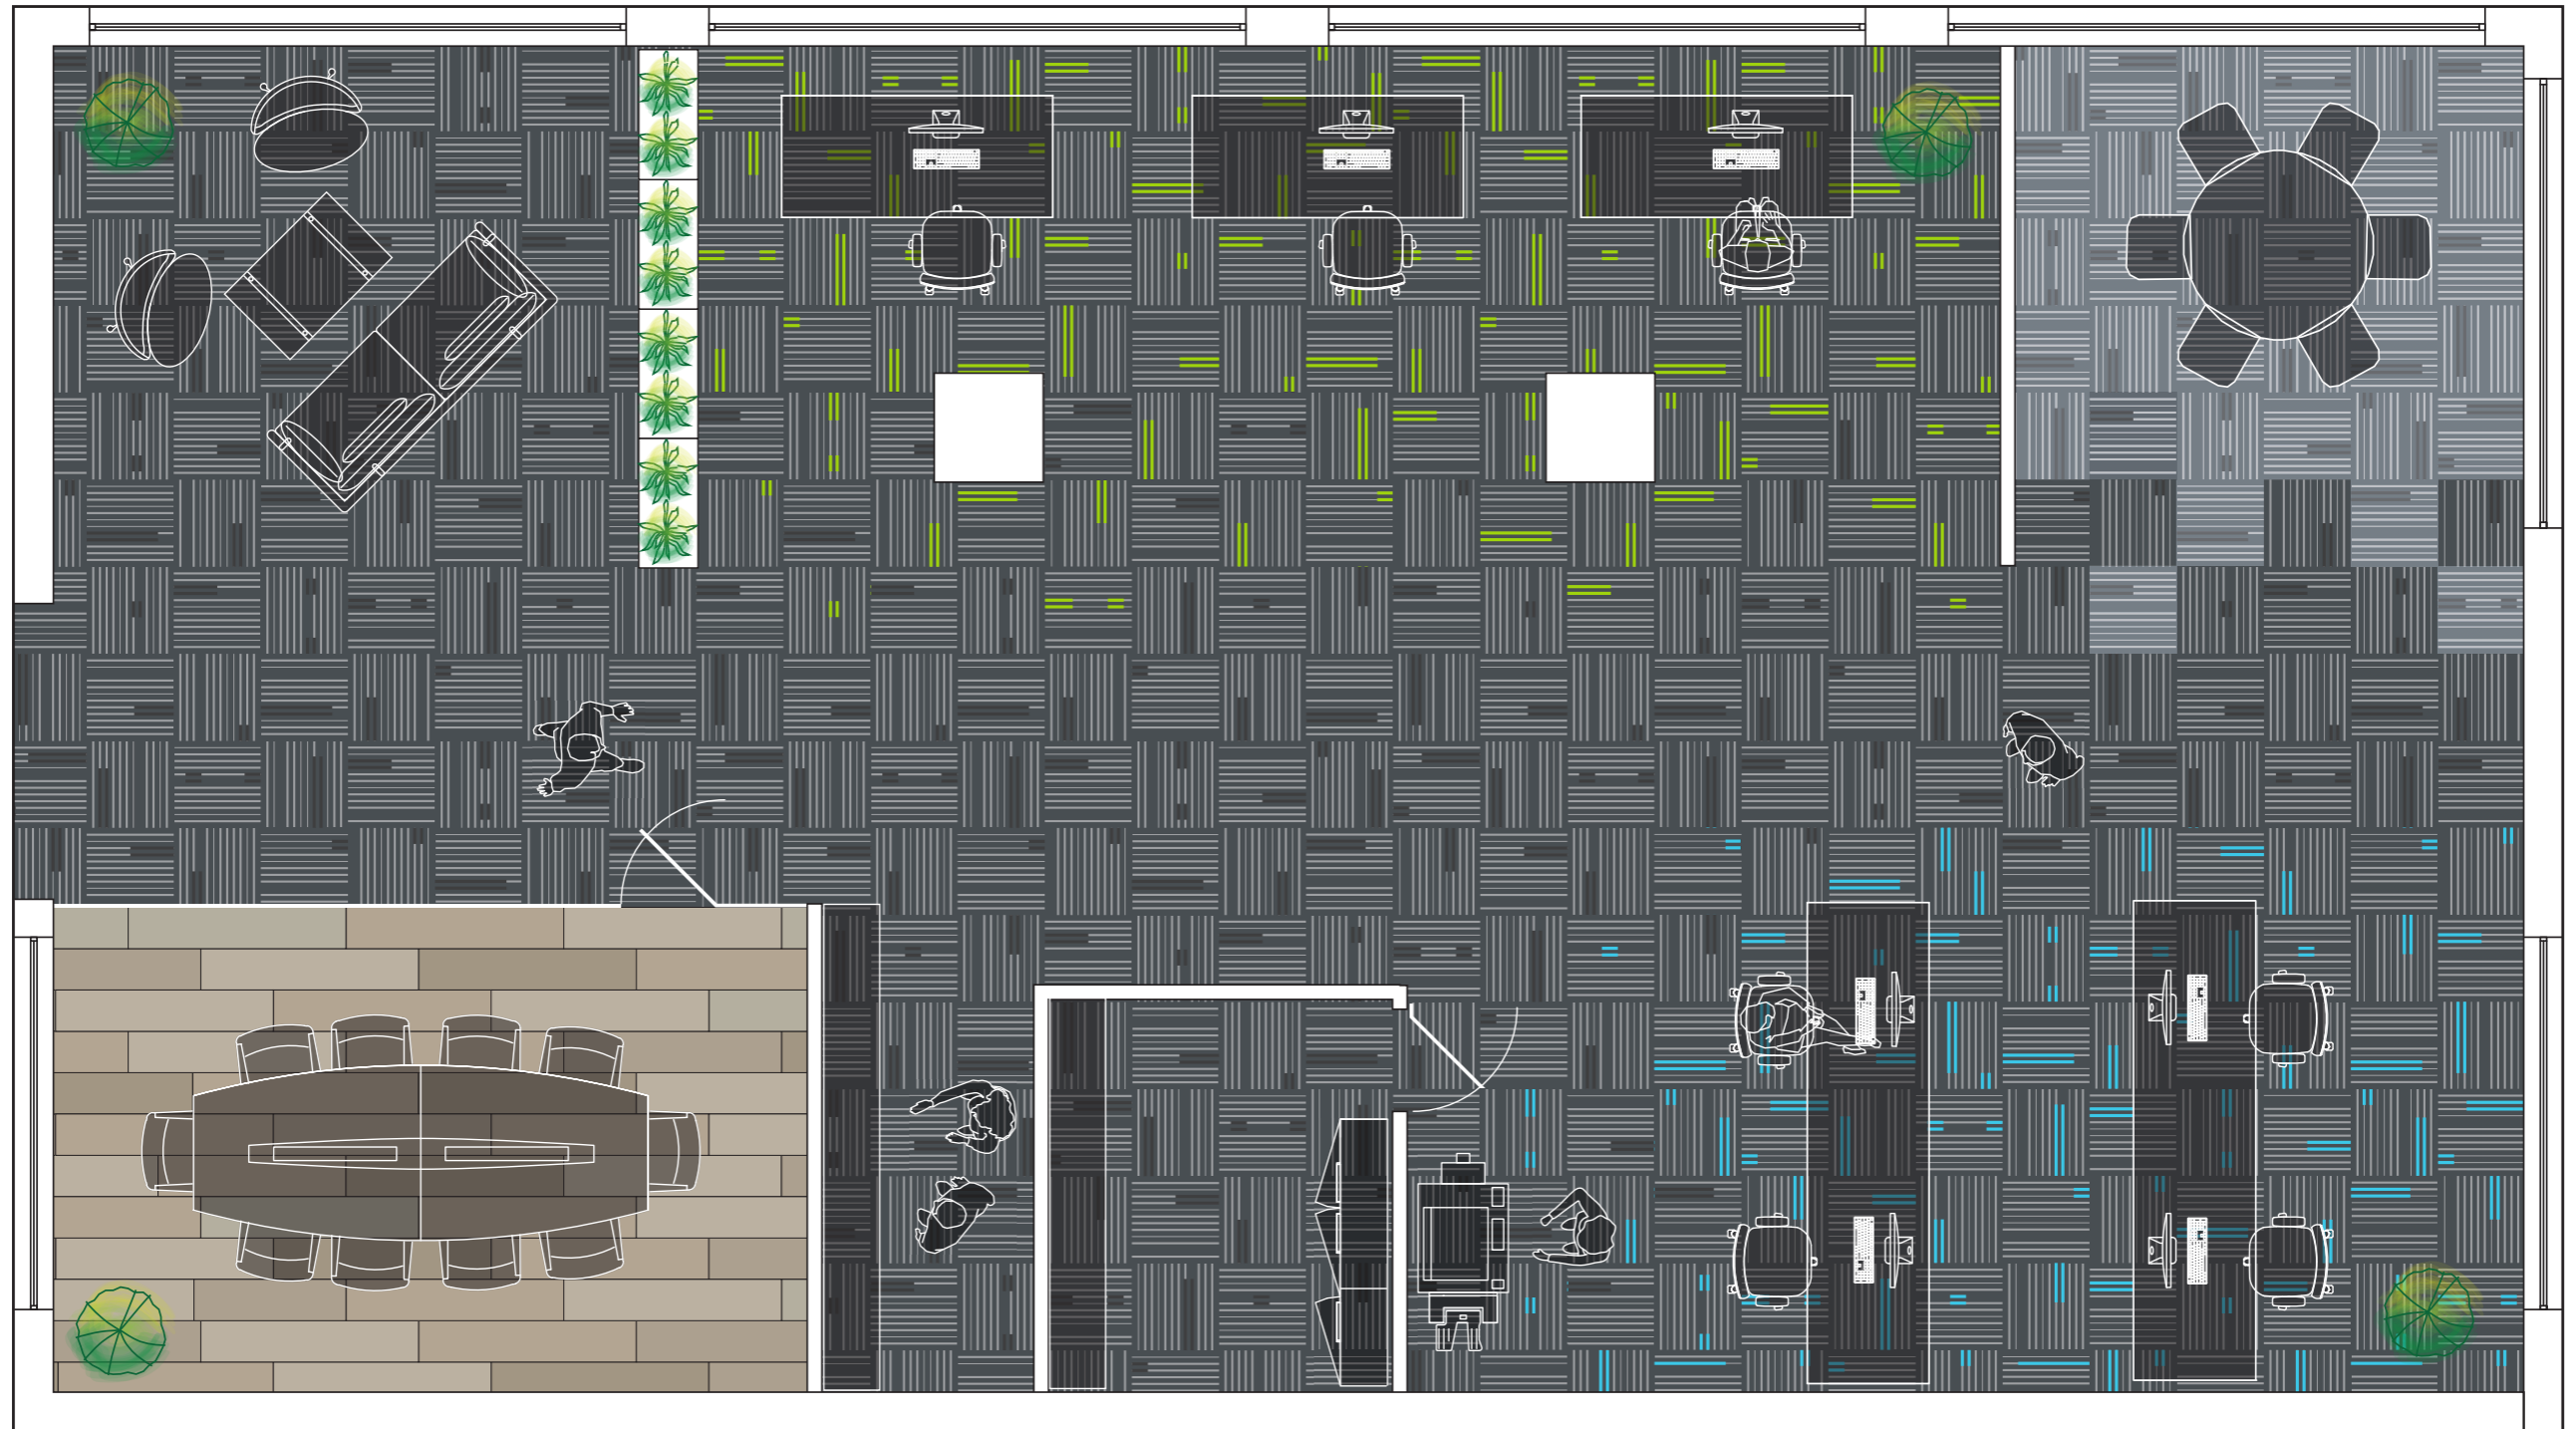
Times Square Tile




 Times Square
Grey 06601
(Installed random)


 Times Square
Light Grey 07700
(Installed random)


 Times Square
Lime 06606
(Installed random)


 Times Square
Light Blue 06608
(Installed random)



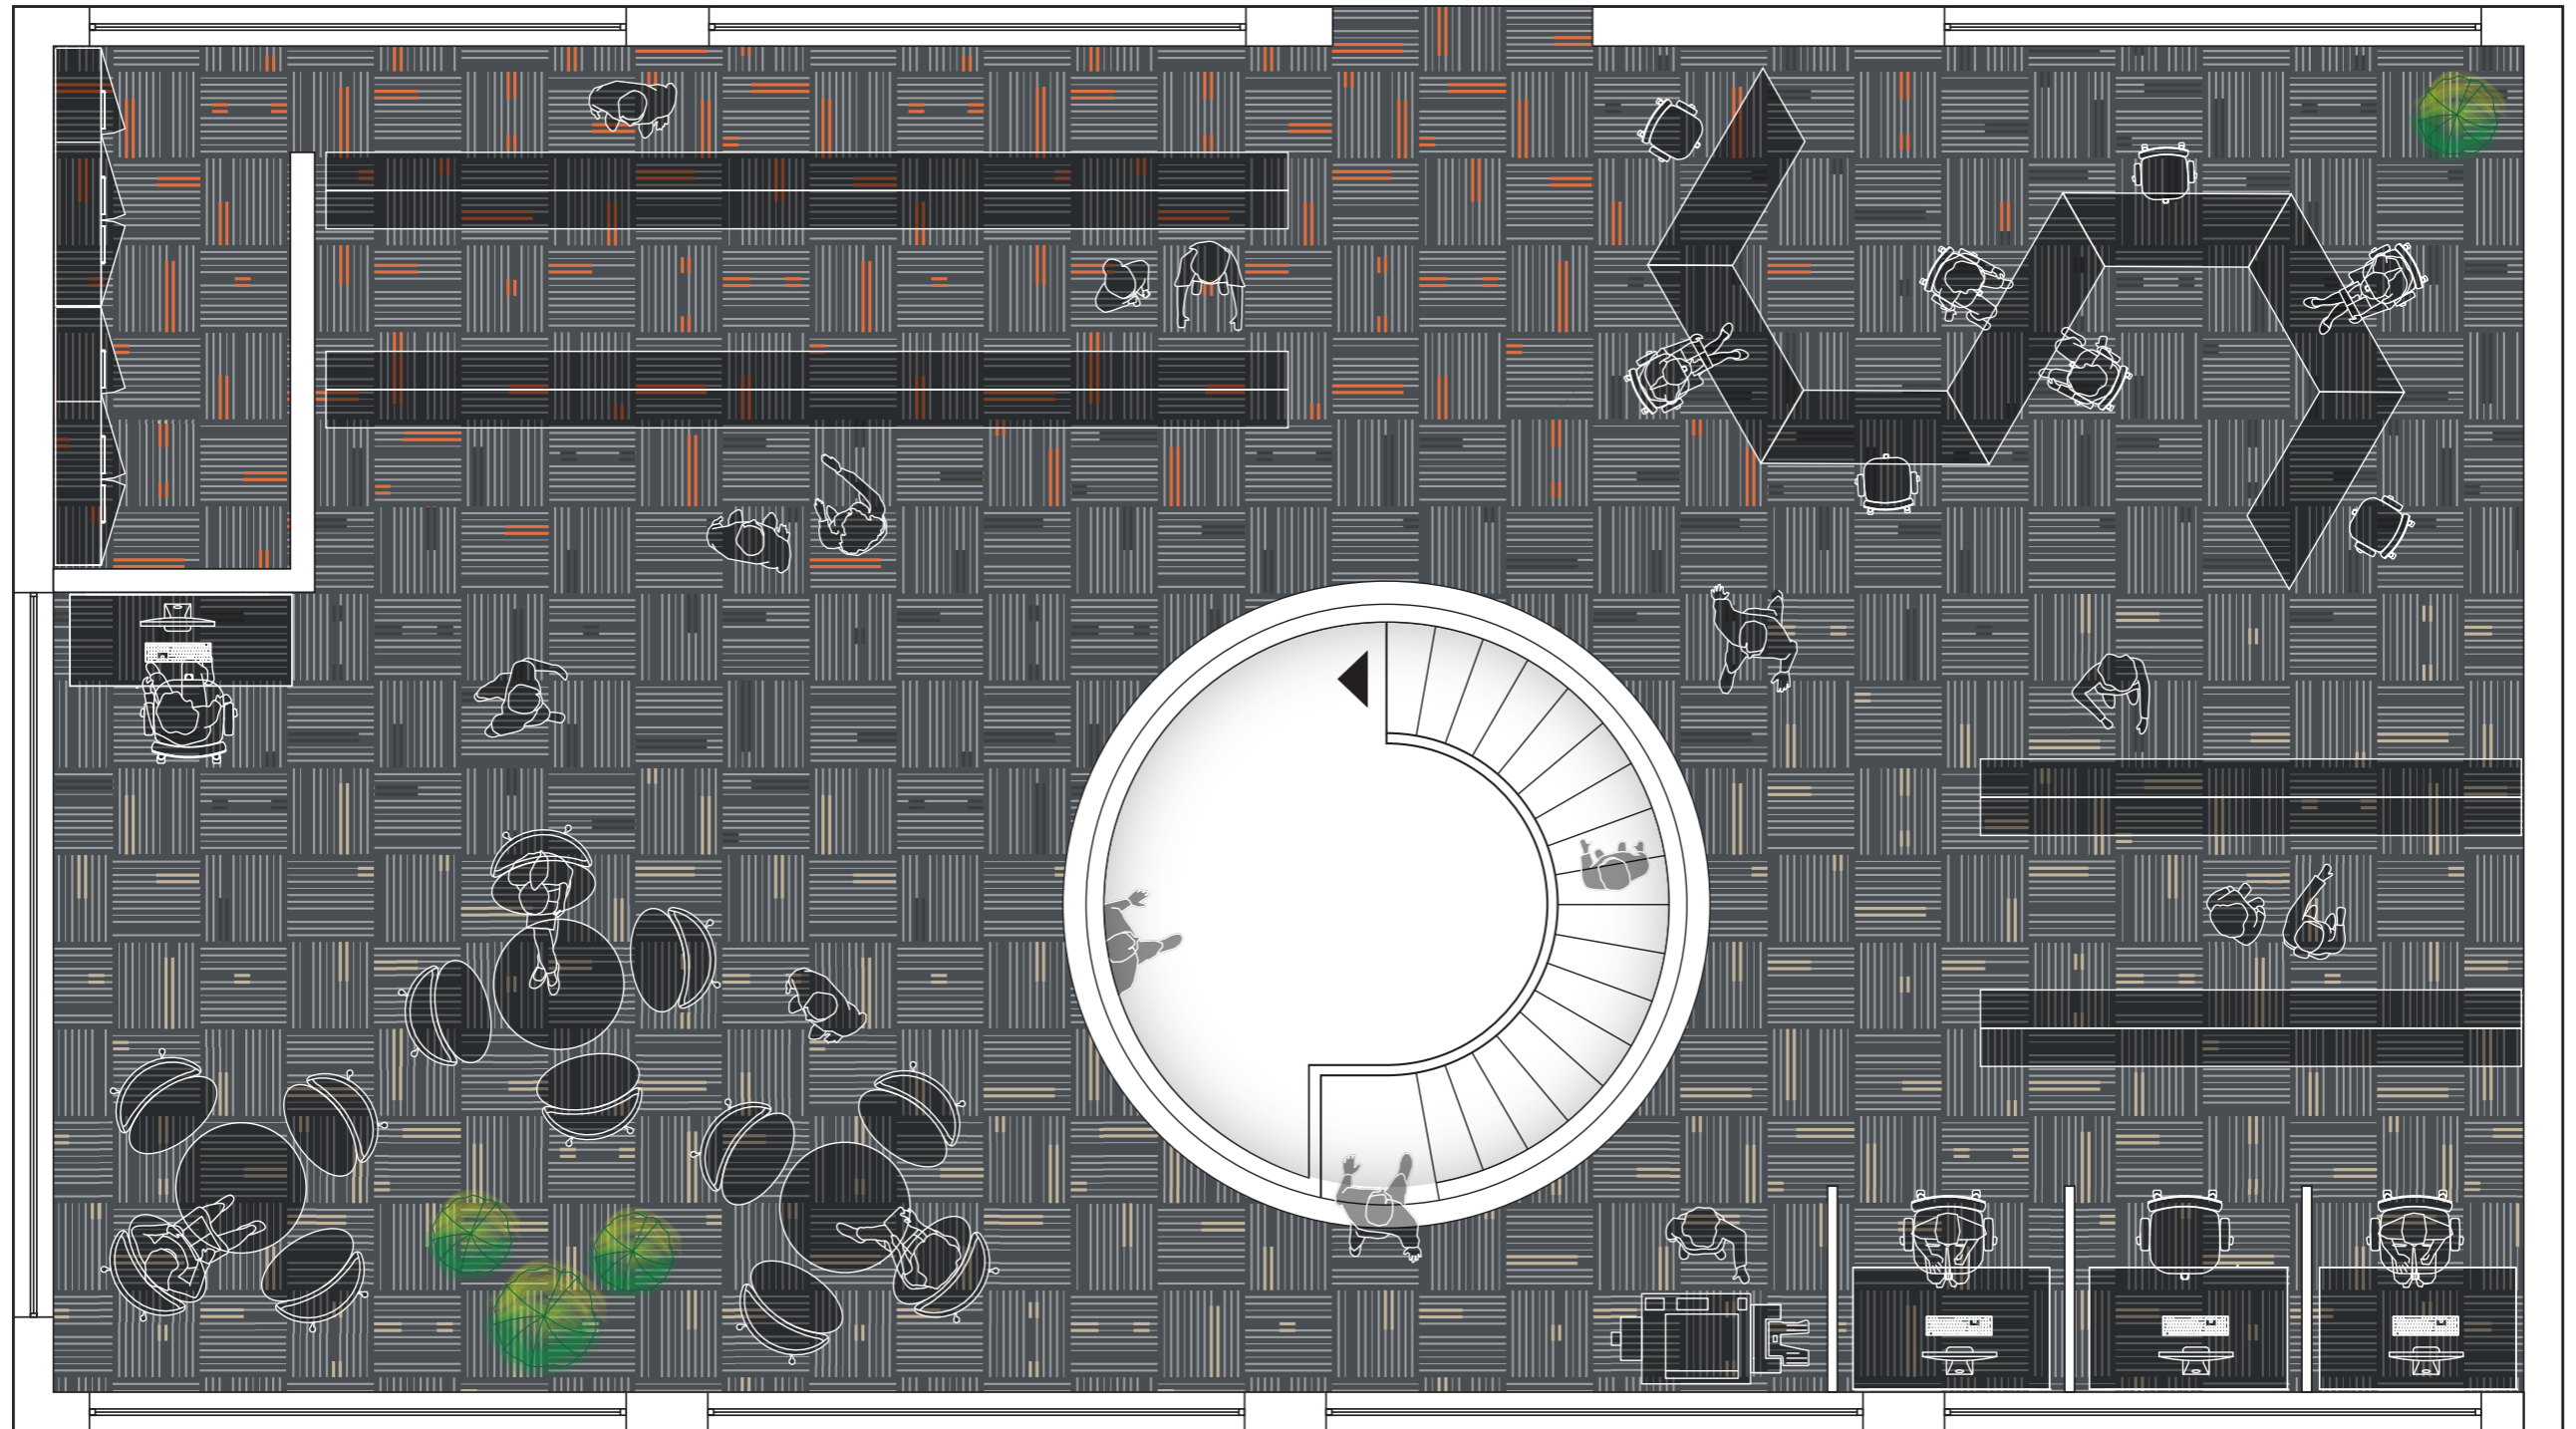

 Times Square
Grey 06601
(Installed random)

 Times Square
Orange 06604
(Installed random)

 Times Square
Natural 06602
(Installed random)



TIMES SQUARE

gerflor.co.uk
gerflor.ie
gradus.com

Uniclass Pr_35_57_11_62
CI/SfB (43) Tn6

TIMES SQUARE

SPECIFICATION

Product Format	Tile
Product Dimensions	500mm x 500mm
Product Construction	Tufted Loop Pile
Surface Yarn	100% Nylon
Total Carpet Weight	3700 g/m ²
Tufted Pile Weight	420 g/m ²
Gauge	1/10" (39.4 per dm)
Stitches	68/10cm
Primary Backing	Non-woven
Secondary Backing	Comfort Lite 90% recycled open cell polyurethane cushion
Total Carpet Thickness	8.6mm
Pile Height	3.4mm

PERFORMANCE SPECIFICATION

Classification BS EN 1307	Class 33 Heavy Commercial Use
Castor Chair BS EN 985 TEST A:2001	Class A - Intensive Use (r value ≥ 2.4)
Static Electricity ISO 6356	Pass ≤ 2.0 kV Permanent Conductive Fibre
Impact Noise Rating BS EN ISO 10140-3	32dB
Sound Absorption BSEN ISO 354:2003	0.30 Class D

FLAMMABILITY

BS EN 13501-1	Class Bfl-s1
---------------	--------------

ADDITIONAL INFORMATION

StainSmart® for soil release
60% recycled content by total product weight

WARRANTIES

Wear Warranty	12 Year
Anti-static Warranty	Lifetime

ADHESIVES

For recommended adhesives contact Technical Services on 03332 412901
--



The information contained in this document is valid from 1/1/2022 and is subject to change at any time without notice.

Contact us to order free samples

UNITED KINGDOM: Gerflor Ltd
Park Green, Macclesfield,
Cheshire, SK11 7LZ
Tel: 03332 412901
E-mail: contractuk@gerflor.com
Visit: www.gerflor.co.uk

IRELAND: Gerflor Ltd
Ballybay Road, Carrickmacross,
Co. Monaghan, Republic of Ireland
Tel: +353 (0) 42 966 1431
E-mail: gerflorirl@gerflor.com
Visit: www.gerflor.ie

Gerflor[®]
theflooringgroup